



**DANE COUNTY DEPT. OF
PUBLIC WORKS, HIGHWAY &
TRANSPORTATION**

1919 Alliant Energy Center Way
Madison, Wisconsin 53713
Office: 608/266-4018 ♦ Fax: 608/267-1533
Public Works Engineering Division
Public Works Solid Waste Division

ADDENDUM 2

June 22 ,2017

ATTENTION ALL REQUEST FOR BID (RFB) HOLDERS

RFB NO. 317023 - ADDENDUM NO. 2

LUSSIER COUNTY PARK BOAT LAUNCH

**BIDS DUE: THURSDAY, JULY 6, 2017, 2:00 PM. DUE DATE AND
TIME ARE CHANGED BY THIS ADDENDUM.**

This Addendum is issued to modify, explain or clarify the original Request for Bid (RFB) and is hereby made a part of the RFB. Please attach this Addendum to the RFB.

PLEASE MAKE THE FOLLOWING CHANGES:

1. Table of Contents

Add “54 – 30 in. Concrete Curb and Gutter” under the DRAWINGS section

2. Sheet 54

Add new Sheet titled “30-in Concrete Curb and Gutter” to the end of the drawings, issued with this Addendum.

If any additional information about this Addendum is needed, please contact Ryan Shore at shore@countyofdane.com.

Sincerely,

Ryan Shore

Project Manager

Enclosures:

Sheet 54 : 30-in Concrete Curb and Gutter

Answers to Questions from Emails


H:\Shared\ENGINEERING DIVISION\Ryan Shore\317023 - Lussier Boat Launch\03 - Addendum\Addendum 2\Addendum 2.docx

Addendum No. 2


RFB No. 317023

- 1 -


rev. 02/16

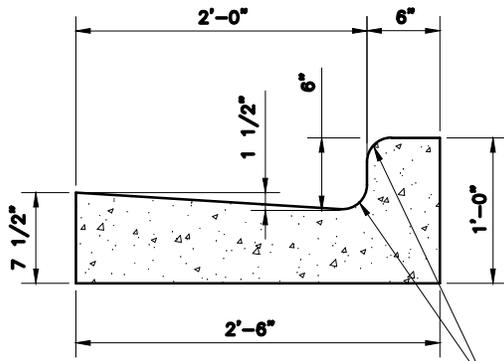


STANDARD SECTION

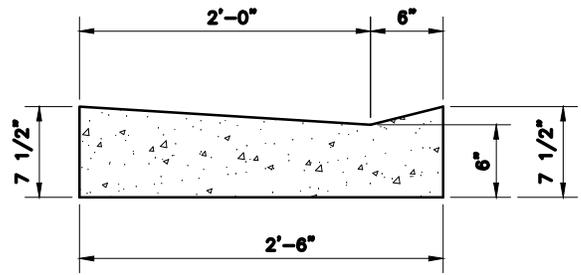


DRIVEWAY SECTION

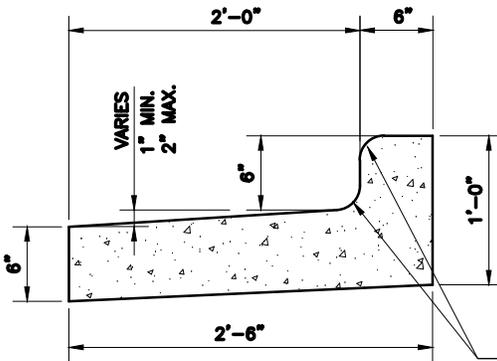

REJECT SECTION

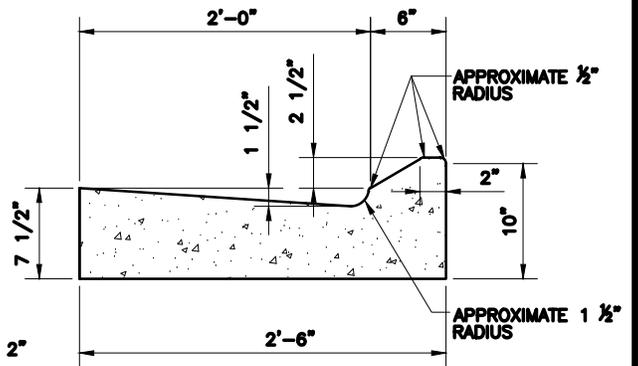

MOUNTABLE SECTION

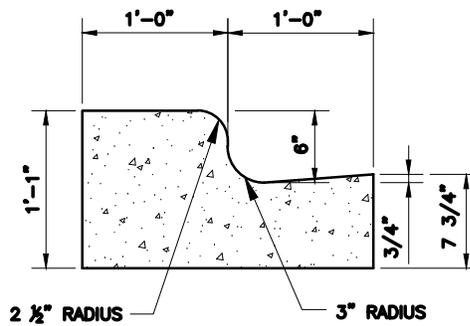

TYPE 'E' SECTION

30-INCH CONCRETE CURB AND GUTTER

STANDARD DETAIL



01-975-82A

OCTOBER 2011

RFB NO. 317023 – ADDENDUM NO.2
LUSSIER COUNTY PARK BOAT LAUNCH
EMAILED QUESTIONS:

Q: The special provisions/plans do not provide a thickness of stone for the proposed aggregate path shown on the plans.

A : 6-inches (shown on XS, but not clearly labeled anywhere).

Q : Could you please confirm the thickness of the concrete sidewalk and base shown on the project?

A : Concrete sidewalk thickness per spec is minimum 5-inches with 4-inches of base per section 7.4.

Q: There is a thickened edge sidewalk along one of the drives. Could you provide a detail for this?

A : See Sheet 2, Access Road Typical, Concrete sidewalk thickness per spec is minimum 5-inches with 4-inches of base per section 7.4.

Q: Can you provide a detail of the curb and gutter listed for the project?

A: Standard 30-in per attached detail.

Q: Path (to Floating dock)

A: This is asphalt per addendum number 1, assume 2.5-inches of asphalt over 6-inches of base.

Q: Borrow Material (6.5)

A: This is part of our standard spec and not necessarily specific to this project. The contractor will have to make his own determination of earthwork and identify the need for additional material. There has not been a borrow site identified for this project.

Q: Surplus Fill Material

A: Surplus fill material can be lost on site under the direction of the county for placement.