

DANE COUNTY DEPARTMENT of PUBLIC WORKS, HIGHWAY and TRANSPORTATION

County Executive
Kathleen M. Falk

1919 Alliant Energy Center Way ♦ Madison, Wisconsin 53713
Phone: (608) 266-4018 ♦ Fax: (608) 267-1533

Commissioner / Director
Gerald J. Mandli

March 31, 2009

ATTENTION ALL REQUEST FOR BID (RFB) HOLDERS

RFB NO. 109061 - ADDENDUM NO. 2

WINDOW REPLACEMENT

HENRY VILAS ZOO ADMINISTRATION BUILDING

BIDS DUE: TUESDAY, APRIL 7, 2009, 2:00 PM. DUE DATE AND TIME ARE NOT CHANGED BY THIS ADDENDUM.

This Addendum is issued to modify, explain or clarify the original Request for Bid (RFB) and is hereby made a part of the RFB. Please acknowledge all Addenda on your Bid Form.

PLEASE MAKE THE FOLLOWING CHANGES:

1. Window Operation

The windows must be double hung and capable of tilting in for easy cleaning. The new windows may have as many panels as contractor needs to fit rough opening, but all panels must be operable.

2. Window Size

Windows must be at least 60" tall. If the new windows are shorter than the existing windows, contractor must fill in the rough opening below the new windows with a knee wall, as described in the specifications. In addition, the contractor may move the top of the new windows down and fill in the rough opening above the new windows by installing a header above the windows. However, this header may be no more than 10" in height. The header shall be constructed according to the same specifications as the knee wall, and its finish shall match adjacent surfaces.

3. Thermal Break

All new windows must have a thermal break.

4. Interior Sill

The interior sill shall be a composite solid surface, color to be chosen by Owner. Interior sill shall be a 1/2" thick, homogenous sheet material composed of acrylic resins, fire-retardant filler materials, and coloring agents. Acceptable materials include Wilsonart Gibraltar, Surell Formica solid surface, or equal as approved by Project Manager. Install sill according to manufacturer's recommendations.

5. Exterior Detail



A sheet of exterior wall details is attached to this Addendum. This sheet has a detail of the existing exterior wall and a detail of the new exterior knee wall. If the new windows are smaller than the existing rough opening, construct the knee wall according to this detail and according to the specifications.

If any additional information about this Addendum is needed, please contact John Welch, Project Manager, at 608/267-8815 or welch@co.dane.wi.us.

Enclosures:

Exterior Wall Details

EXTERIOR WALL DETAILS

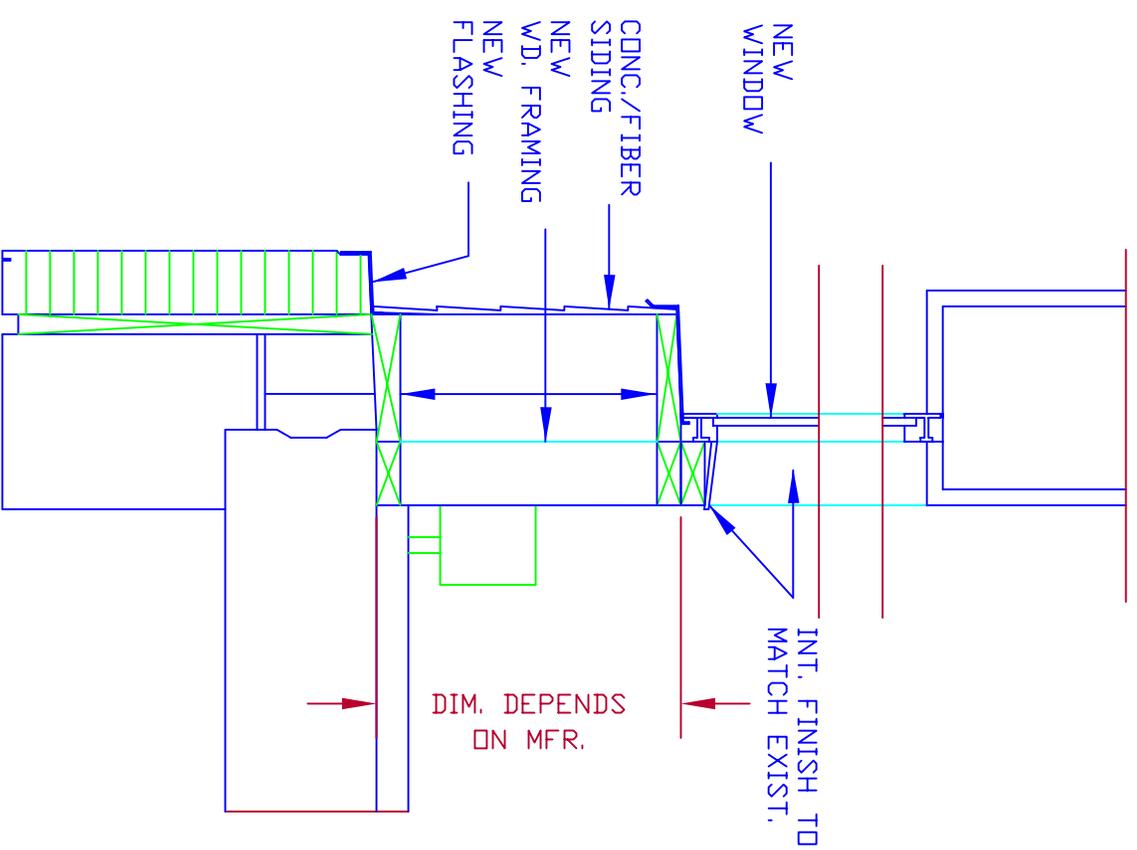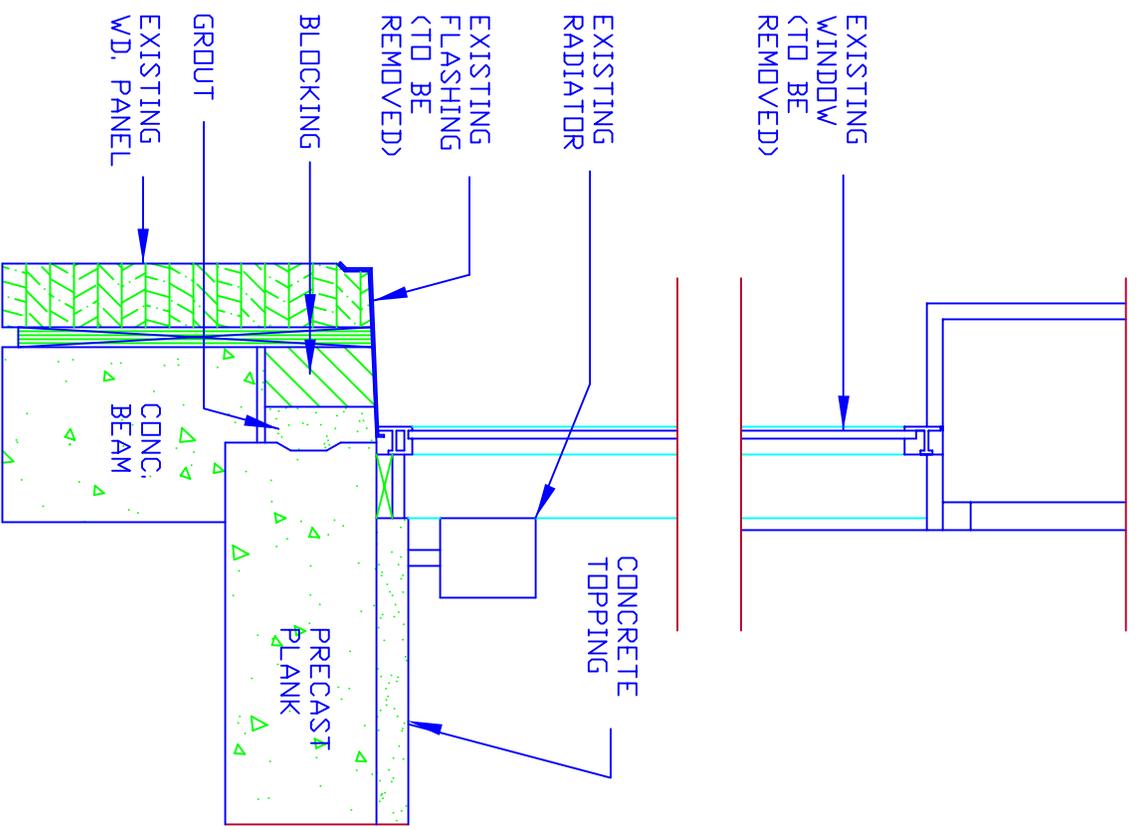

EXISTING

WITH KNEE WALL