

BASKETBALL ARRANGEMENT

GENERAL DESCRIPTION:

FOUR-SIDED BASKETBALL / HOCKEY SCOREBOARD MODEL-A150 WITH INTERNALLY ILLUMINATED TOP AND BOTTOM ADVERTISING PANELS. ALL FOUR SIDES OF THE SCOREBOARD FACE IDENTICAL.

OVERALL SIZE: 10' - 2"H x 13' - 6"L SQUARE AT TOP $II' - 6\frac{1}{2}$ L SQUARE AT BOTTOM

TOP ADVERTISING PANEL:

2' - 2"H x 13' - 6"L SQUARE AT TOP

SCOREBOARD:

5' - 10"H x 13' - 6"L SQUARE AT TOP 12' - I"L SQUARE AT BOTTOM

BOTTOM ADVERTISING PANEL: $2' - 2''H \times 11' - 6\frac{1}{2}''L$ SQUARE AT BOTTOM

SCOREBOARD NUMERALS-

ALL INDOOR 4 x 7 SINGLE STROKE LAMP NUMBER PATTERN; CLOCK AND SCORES, 12" HIGH NUMERALS; ALL OTHERS, 10" HIGH NUMERALS.

REAR-ILLUMINATED SCOREBOARD CAPTIONS-

BASKETBALL CAPTIONS: PERIOD, BONUS, TIMEOUT, PLAYER FOULS, AND TEAM FOULS, $4\frac{1}{2}$ " HIGH HELVETICA MEDIUM STYLE LETTERING. HOCKEY CAPTIONS: TIME OUTS LEFT, PENALTY, PLAYER, AND PERIOD, $4\frac{1}{2}$ " HIGH HELVETICA MEDIUM STYLE LETTERING.

INTERNALLY ILLUMINATED ADVERTISING PANELS-

TOP ADVERTISING PANEL: REAR-ILLUMINATED COPY AREA, I'- 8"H x II' - 6"L WHITE PLEX. ADVERTISEMENTS.

BOTTOM ADVERTISING PANEL: REAR-ILLUMINATED COPY AREA, I' - 8"H x 10' - 0"L WHITE PLEX. ADVERTISEMENTS.


POWER REQUIREMENTS -

120 - 208VAC, 60Hz, 3 PHASE, 4 WIRE POWER SUPPLY, TOTAL DEMAND-II, 160 WATTS (TYPICAL LOAD 65% - 70% OF TOTAL DEMAND)

ADVERTISING PANELS: 1,760 WATTS (32, F72T12/CW LAMPS) 9,400 WATTS (10 WATT, #1815, #37, AND #161 LAMPS) SCOREBOARD:

APPROXIMATE WEIGHT OF TOTAL SYSTEM- 4,000 LBS.

CHANGEABLE SCOREBOARD TEAM NAMES-7 x 48 LAMP LENS MATRIX SYSTEM, 6" HIGH CHARACTERS.

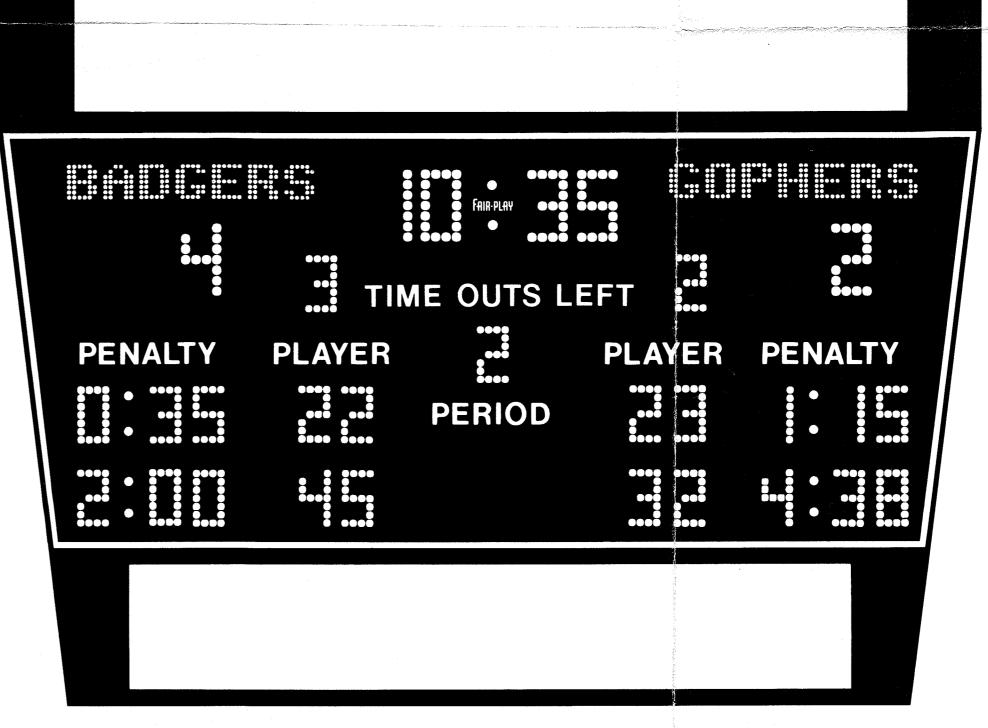

HOCKEY ARRANGEMENT



FOUR-SIDED BASKETBALL/HOCKEY SCOREBOARD MODEL-A150 WITH ADVERTISING PANELS